

ORBIT 60 SERIES

External Display System

Datasheet

Cordant™

154M8401 Rev. C



Orbit Display

The Orbit Display system includes your choice of display screen, an industrial computer with a customized operating system, and software that communicates with one or more Orbit 60 systems. The system can be certified for hazardous locations. Condition monitoring data is communicated to external displays via a Display Port or VGA connection. Touchscreen connection can use USB or Serial connection.

The Orbit Display shows Orbit 60 machinery protection system information such as:

- Direct measurements
- 1X measurements
- Gap measurements
- Measurement alarms
- System event list
- Alarm event list

The standard tabs show direct measurements, 1x filtered vibration measurements, gap values, and other trended variables.



Display Placement

Expensive KVM Extenders are not needed to place displays far away from Orbit 60 installation locations. Since the Orbit Display connects to Orbit 60 chassis via standard Ethernet network connections, the Orbit 60 Display system can be placed anywhere your Ethernet network infrastructure supports. The display location is only limited by security and network infrastructure necessary to support Orbit Display.

It is possible to place Orbit Display in a variety of locations:

- Physically adjacent to Orbit 60 chassis
- Next to the machines being monitored
- In a local or remote control room



Baker Hughes 

Touchscreen Display Support

Orbit Display uses a touchscreen display. You can show data from up to twelve Orbit 60 chassis connected via Ethernet on a single Orbit Display.

If necessary, Bently Nevada can produce custom drivers for specific displays and pointing devices. For assistance, or for a list of supported displays and required drivers, contact Bently Support at Bently.com/support.

The Orbit Display is backwards compatible with the existing 10.4" and 15" displays currently supported by the 3500 system:

Supported Displays	
120M8155-01	10.4" 1024x768 Hazardous Location Display
102M8950	15" 1024x768 Hazardous Location Display
150M1466	21.5" 1920x1080 Industrial Display

Display Burn-in or Ghosting

All display technologies are susceptible to burn-in or ghosting, which occurs when static and cumulative non-uniform pixel use discolors areas on a screen. Burn-in can be noticed when the display changes and when the display is turned off.

Display Brightness

The brightness of an LCD display is the amount of light emitted and is measured in nits or candelas per square meter, which has units of nits or cd/m². Most commercial desktop displays have a brightness of 200 to 300 nits. To see a display in outdoor light requires a brightness of about 700 nits or greater. Almost all new LCD displays use some form of white or RGB LED backlight.

Display Brightness Half-Life

An important characteristic of an LED backlight is the brightness half-life, which is the time measured in hours that the brightness output will decrease by half after running the LED backlight at full brightness. The decrease in brightness will not substantially decrease after the half-life time has elapsed. Most displays have a half-life of around 50,000 hours (or 5.7 years). Some of the brighter displays can have a half-life of 20,000 hours or less.

Bright Idea: The brightness life of the display can be dramatically increased and burn-in can be mitigated by allowing the screen saver to dim and/or turn off the display when not in use.

10.4" Hazardous Area Display



10.4" Hazardous Area Display

Part Number 120M8155-01

Warranty 1 Year

Screen Specifications

Screen 10.4" Diagonal Size
LCD with LED back light

Resolution 640 x 480 pixels
4:3 Aspect Ratio

Brightness 450 nits (cd/m²)

Brightness
Half-Life 50,000 hours
(5.7 years)

Features

Video
Interface VGA

Touch Screen
Type Resistive Touch Screen

Cable
Interface Serial

Control
Settings Front panel button

Mounting
Styles Panel Mount, 19" EIA Rack
Mount, and Independent
Mount

10.4" Hazardous Area Display

Power

Voltage 24 Vdc nominal voltage
range 10 to 28 Vdc

Inrush Current 3.5 A @ 24 Vdc
Less than 500 μ s duration

Operating
Current Less than 500 mA

Physical Characteristics

Weight 4.0 kg (8.78 lbs.)

Dimensions 15.25 x 9.8 x 1.93 in
(387.4 x 248.9 x 49 mm)

Panel Cutout 13.5 x 9.0 in
(342.9 x 228.6 mm)

Environmental Limits - Indoor Use Only

IP Rating Designed for IP54 ingress
protection against dust and
water spray to the front only.

Operating
Temperature -20 to 65°C (-4 to 149°F)

Storage
Temperature -20 to 70°C (-4 to 158°F)

Ambient
Relative
Humidity 10 to 85% non-condensing

Standards and Certifications

Refer to External Display Datasheet
(154M8401)

15" Hazardous Area Display



15" Hazardous Location Display (for Class 1 Div 2) CSA/NRTL/C

Part Number 102M8950

Warranty 1 Year

Screen Specifications

Screen 15" Diagonal Size
TFT LCD with LED back light

Resolution 1024 x 768 pixels
4:3 Aspect Ratio

Brightness 350 nits (cd/m²)

Brightness
Half-Life 50,000 hours
(5.7 years)

Features

Video
Interface VGA and DVI-D

Touch Screen
Type 5-Wire Resistive Touch
Screen

Touch Screen
Interface Serial and USB-B

Control
Settings Front panel button

Mounting
Styles Panel Mount and 19" EIA Rack
Mount

15" Hazardous Location Display (for Class 1 Div 2) CSA/NRTL/C

Power

Voltage 24 Vdc nominal voltage
range 12 to 24 Vdc

Inrush Current 2.62 A @ 24 Vdc
Less than 500 μ s duration

Operating
Current ~100 mA

Physical Characteristics

Weight 8.5 kg (18.74 lbs.)

Dimensions 16.61 x 13.31 x 2.68 in
(422 x 338 x 68 mm)

Panel Cutout 15.59 x 11.65 in
(396 x 296 mm)

Environmental Limits - Indoor Use Only

IP Rating IP65 ingress protection
against dust and water spray
compliant to the front only.

Operating
Temperature -20 to 60°C (-4 to 140°F)

Storage
Temperature -20 to 80°C (-4 to 176°F)

Ambient
Relative
Humidity 10 to 95% non-condensing

Standards and Certifications

Refer to External Display Datasheet
(154M8401)

21.5" Industrial Display



21.5" Industrial Display	
Part Number	150M1466
Warranty	1 Year
Screen Specifications	
Screen	21.5" Diagonal Size TFT LED LCD
Resolution	1920 x 1080 pixels 16:9 Aspect Ratio
Brightness	300 nits (cd/m ²)
Brightness Half Life	50,000 hours (5.7 years)
Features	
Video Interface	VGA and DVI-D
Touch Screen Type	Projected Capacitive Touch Screen
Touch Screen Interface	USB-B and Serial
Control Settings	Control buttons on rear panel
Mounting Styles	Panel Mount and 19" EIA Rack Mount

21.5" Industrial Display	
Power	
Voltage	24 Vdc nominal voltage range 22 to 26 Vdc
Inrush Current	≈ 3 A @ 24 Vdc Less than 500 μs duration
Operating Current	≈ 200 mA
Physical Characteristics	
Weight	8 kg (17.6 lbs.)
Dimensions	21.98 x 13.77 x 1.88 in (558.4 x 349.8 x 47.7 mm)
Panel Cutout	21.67 x 13.46 in (550.3 x 341.8 mm)
Environmental Limits - Indoor Use Only	
IP Rating	IP66 ingress protection against dust and water spray compliant to the front only.
Operating Temperature	-30 to 70°C (-22 to 158°F)
Storage Temperature	-40 to 75°C (-40 to 167°F)
Ambient Relative Humidity	10 to 90% non-condensing
Standards and Certifications	
Refer to External Display Datasheet (154M8401)	

Industrial Computer for Display



CPU Module	
CPU	Intel Atom processor E3845 (quad-core, 1M cache, 1.91 GHz)
System Memory	4 GB
Storage	SD 3.0 (SDHC/SDXC) 128 GB
Display	Intel HD Graphics 4000
Peripherals	
USB	2 – USB-A 2.0
VGA	Resolution up to 1920 x 1200 pixels at 75 Hz HDB-15F port
DisplayPort	Resolution up to 2560 x 1600 pixels at 60 Hz receptacle
Ethernet	4 – Auto-sensing 10/100/1000 Mbps RJ45 ports Magnetic Isolation Protection 1.5 kV
Serial	2 – RS-232/422/485 DB9M ports
Power	
Voltage	12/24 Vdc (11.4 to 36 Vdc)
Power	Less than 30 W (nominal)

CPU Module	
LEDs	
System	Power
Storage	SD
LAN	2 LEDs per port for 100/1000 Mbps
Serial	2 LEDs per port (Tx and Rx)
Physical Characteristics	
Weight	1.75 kg (3.86 lbs.)
Dimensions	132 x 122 x 87 mm (5.20 x 4.81 x 3.43 in.)
Environmental Limits - Indoor Use Only	
Operating Temperature	-40 to 70°C (-40 to 158°F)
Storage Temperature	-45 to 75°C (-49 to 167°F)
Ambient Relative Humidity	5 to 95% (non-condensing)
Anti-Vibration	0.7 g @ DNV GL (Class A), sine wave, 2-100 Hz, 1 Oct./min., 1.5 hr. per axis 1 g @ DNV GL, random wave, 3-100 Hz, 2.5 hr. per axis
Anti-Shock	50 g, 11 ms ±X, ±Y, ±Z, 3 shocks each axis with SD
Standards and Certifications	
Refer to External Display Datasheet (154M8401)	

Compliance and Certifications

FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

EMC

European Community Directive:

EMC Directive 2014/30/EU

Standards:

EN 61000-6-2; Immunity for
Industrial Environments
EN 61000-6-4; Emissions for
Industrial Environments

RoHS

European Community Directive:

RoHS Directive 2011/65/EU

Electrical Safety

10.4" Hazardous Area Display

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 61010-1

15" Hazardous Area Display

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 62368-1

21.5" Industrial Display

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 62368-1

Industrial Computer

European Community Directive:

LV Directive 2014/35/EU

Standards:

EN 61010-1
EN 61010-2-201

Hazardous Area Approvals



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to bntechsupport.com and access the Bently Nevada Media Library.

ATEX/IECEX



II 3 G
Ex ec IIC T4 Gc
T4 @ Ta= -40°C to +70°C (-40°F to +158°F)

10.4" Hazardous Area Display

cNRTLus

Class I, Zone 2: AEx/Ex ic nA IIC T4

Class I, Zone 2: AEx/Ex ic ec IIC T4

T4 @ Ta= -20°C to +65°C (-4°F to +149°F)

ATEX/IECEX



II 3 G
Ex ic ec nA IIC T4 Gc

T4 @ Ta= -20°C to +65°C (-4°F to +149°F)

15" Hazardous Area Display

cNRTLus

Class I, Division 2, Groups A, B, C, D

Industrial Computer

cNRTLus

Class I, Zone 2: AEx/Ex ec IIC T4 Gc

Class I, Division 2, Groups A, B, C, D T4

T4 @ Ta= -40°C to +70°C (-40°F to +158°F)

Ordering Information



For the detailed listing of country and product-specific approvals, refer to the [Approvals Quick Reference Guide \(108M1756\)](#).

For additional technical documentation, please log in to bntechsupport.com and access the Bently Nevada Media Library.

External Display

Bently Nevada offers three display systems with different resolution, capabilities, mounting options, accessories, and certifications. Not all options are available for all displays.

60X/EXDAA-BB-CC

AA – Display

01	10.4" Hazardous Area Display
02	15" Hazardous Area Display (for Class 1 Div 2) CSA/NRTL/C
04	21.5" Display

BB – Agency Approvals

00	No Approval Certifications
01	CSA/NRTL/C (Class 1 DIV 2) (only available for the 60X/EXD01 10.4 in display and 60X/EXD02 15 in display)
02	Multi (CSA, ATEX, IECEx) (only available for the 60X/EXD01 10.4 in display)

CC – Mounting Options

01	19" Rack Mount Panel
02	Panel Mount Kit
04	Independent Mount (only available for the 60X/EXD01 10.4 in display)

Industrial Computer for Display

60X/CMP01-AA

AA – Agency Approvals

00	No Approval Certifications
01	CSA/NRTL/C (Class 1 DIV 2)
02	Multi (CSA, ATEX, IECEx)

Includes DIN Mounting Kit, 24 Vdc 90-Watt DIN Mountable Power Supply, USB Mouse, 24 Vdc Power Cable, 10' (3 m) Ethernet Cable. A 20' Ethernet cable accessory is available.

Front Panel Configurations

60X/CMP01-AA

3U Front Panel: SIM w/ No Display

60R/PNL01	with options for country-specific codes
-----------	---

3U Front Panel: No SIM & No Display

60R/PNL03	with options for country-specific codes
-----------	---

6U Front Panel: SIM w/ No Display

60R/PNL07	with options for country-specific codes
-----------	---

No part number is offered for Bulkhead spare or replacement front panel.

Display Accessories

10.4" C1D2 Hazardous Area Display

120M8155-01	Bently Nevada 10.4" Hazardous Area Display
122M3369-01	Rack Mount kit for 10" Display
122M3370-01	Panel Mount kit for 10" Display
122M3371-01	Independent Mount for 10" Display

15" C1D2 Hazardous Area Display

102M8950	15" Hazardous Area Display
104M3812-01	Rack Mount Kit for 15" Display

21.5" Industrial Area Display

150M1466	21.5" Industrial Display
150M0633-01	19" Rack Mount Panel for 21.5" Display

Display Cables		10.4"	15"	21.5"
02200794	24 Vdc 90-Watt Power Supply	X	X	X
119M6509-01	10' Power cable/plug	X		
119M6509-02	10' Power cable/ plug		X	X
161087-10-00	10' VGA cable	X	X	X
161087-20-0	20' VGA cable	X	X	X
148638-01	10' Serial cable		X	
187M1995*	10' Custom serial cable	X		
148638-02	25' Serial cable		X	
174013	3m (9.8') USB Cable			X
149M1306	7m (25') USB Cable			X


*Custom Touch Screen Commands cable pinout for 187M1995

AWG	CONN 1	COLOR	CONN 2
22	2	RED	2
	3	WHITE	3
	5	BLACK	5
	SHELL	SHIELD	SHELL

Bently Nevada Industrial Computer

142M4200	Industrial Computer
02200794	24 Vdc 90-Watt Power Supply (both computer and display)
119M6509-05	10' Power cable and plug
149M1309	USB Mouse
149M1310	3m (10') Ethernet patch cable
138131-010	3m (10') shielded Ethernet cable
149M1311	7m (25') Ethernet patch cable
138131-025	7m (25') shielded Ethernet cable

Graphs and Figures

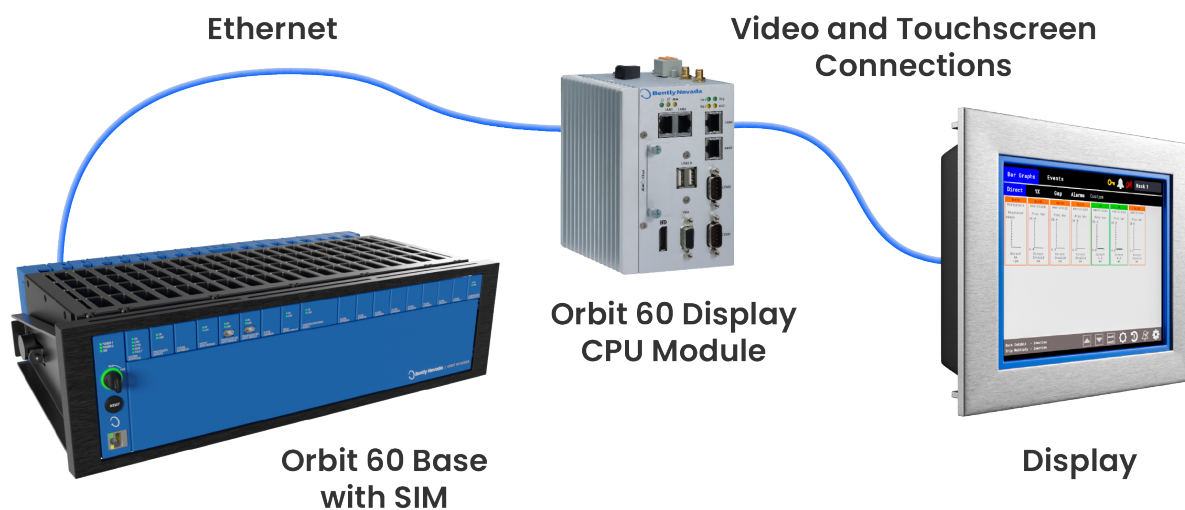

Copyright 2025 Baker Hughes Company. All rights reserved.

Bently Nevada, a Baker Hughes Company
1631 Bently Parkway South, Minden, Nevada USA 89423
<https://bntechsupport.com>