


Frame 7/1EA gas turbine (91 MW)

40+ years of continuous enhancements

Exclusive distributor of GE Power products for the oil and gas market

Copyright 2025 Baker Hughes Company. All rights reserved. The information contained in this document is company confidential and proprietary property of Baker Hughes and its affiliates. It is to be used only for the benefit of Baker Hughes and may not be distributed, transmitted, reproduced, altered, or used for any purpose without the express written consent of Baker Hughes.

Industry leader in gas turbine technology

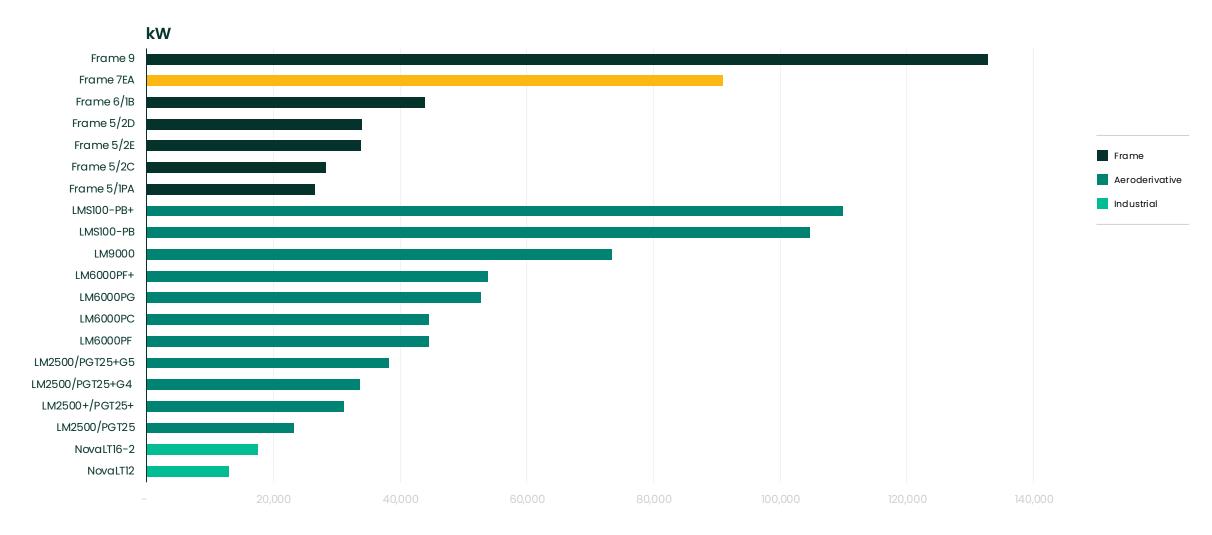



Frame 7/1EA

Single-shaft gas turbine with hot-end drive and proven reliability and energy efficiency.

With over 1,150 units installed worldwide, the Frame 7/1EA gas turbine is well-proven for its energy efficiency, maintainability—as well as high reliability and availability in both power generation and mechanical drive applications.

It's a fuel-flexible turbine that can operate on natural gas, liquefied natural gas (LNG), distillate, and treated residual oil in a variety of applications.

It is continually improved by advanced technology injections through our conversions, modifications, and upgrades.

Key technical and benefits

- Output: 91,000 Kw
- Efficiency: 33.9%
- The combustion chamber system is available in both standard (diffusive) and DLN1+ (Dry Low NOx) versions
- Enhanced fuel flexibility with no impact on combustor's operability or integrity

Main applications

- LNG
- Pipeline
- · Gas storage





Package

Compact design

- Compact and quick to install
- Suitable for generator-drive and mechanical-drive applications
- Dual-base configuration for auxiliaries and engine



Typical mechanical-drive package



Package

Installation and maintenance

The Frame 7/1EA gas turbine is delivered with an auxiliary skid that includes:

- Auxiliary gearbox and coupling
- Lubricating oil system with filters, pumps, heat exchanger, and reservoir
- · Starting motor and turning device
- · Hydraulic oil system with shaft-driven oil pump

Horizontal mid-split casings enable easier access to turbine components and facilitate maintenance at site.

Service/upgrades

To improve the performance of aged models, a wide range of upgrade kits are available, including:

- Power output increase MW
- Efficiency % increase
- Maintenance intervals extension
- · Emissions reduction

Frame 7/1EA interval extension capability

Standard or DLN combustion inspections	Maintenance intervals—factored fired hours (FFH)/factored fired starts (FFS)
DLN1	12,000/450
DLN1 LN (Iow NOx)	24,000/600
DLN1+ LN	32,000/1,300
DLN1+ ULN (ultra low NOx)	32,000/1,300
STD	8,000/450
STD with Extendor™	24,000/900
STD with Advanced Extendor TM	32,000/900
MNQC (multi nozzle quiet combustion)	12,000/450

Note: Frame 7/1EA gas turbine maintenance in public GER3620



Datasheet

Main architecture attributes

- 17-stage axial compressor
- Three turbine stages with aircooled first and second-stage nozzles and buckets
- 10 combustion chambers with reverse-flow STD/DLN1+/DLN1+ ULN combustion system (single-digit NOx emissions)
- Able to burn a wide range of fuels including crude oil
- Dual-fuel capability with STD/DLN1+DLN1+ ULN combustion system; up to 100% H₂ burnability with STD combustor

Power generation

		DLN
Power	MW	91
Efficiency	%	33.9
NOx	ppm	4
Exhaust	°C	552
Speed	rpm	3,600

Package (typical dimensions and weights)

		GT skid	Aux skid	CE CO+ helper skid
LxWxH	m	11.6.x3.6x4.4	8.4x3.6x3.6	15.5x5.1x4.5
Weight	kg	134,000	38,000	308,000

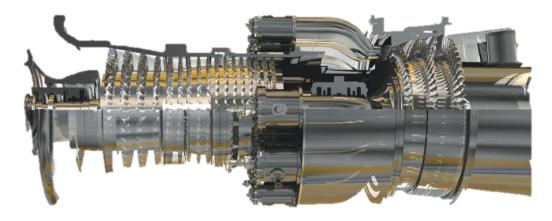


Image courtesy of GE Power





Projects

Saudi Arabia: power plant

- High fuel flexibility
- Frame 7/1EA operating with crude oil

Yamal: LNG project

- Frame 7/1EA operating in harsh ambient conditions down to -50°C
- Mechanical-drive: Frame 7/1EA drives three large centrifugal compressors



Massa plant

 Proven experience to test Frame 7/1EA and other large gas turbines in string configuration with driven equipment



