

5¹/₈-in. Navi-Drill DuraMax D050-5065C Motor

Equipped with high performance elastomer

Tool Specifications

Length (shoulder – shoulder)	31.2 ft	9.5 m
Weight	1,455 lb	660 kg
Bit box to bend	4.1 ft	1.2 m
Bit size range	5 ¹ / ₈ in. – 7 in.	
Top connection	NC38 Box	
Bit connection (optional)	3 ¹ / ₂ -in. API Reg. Box (NC35 Box)	
Max. slick OD at wear ring	5.31 in.	135 mm
Deflection angle range of AKO	0° – 1.8°	
BUR and surface RPM limits	see BUR Charts	

Power Section

Lobe configuration	5/6	
Stages	6.5	
Speed	55–185 rpm	
Flow rate	106–360 gpm	400–1,360 lpm
Speed to flow ratio	0.51 rev/gal	0.13 rev/l
Rotor nozzle	No	
No load pressure drop	350 psi	24 bar
Max. temperature	265°F	130°C

Performance Data

Operational Limits

Differential pressure	1,340 psi	93 bar
Torque	5,100 ft-lb	6,900 Nm

Power output

Maximum Operational	177 hp	132 kW
Differential pressure	1,790 psi	123 bar
Torque	6,800 ft-lb	9,200 Nm
Power output	236 hp	176 kW




5¹/₈-in. Navi-Drill DuraMax D050-5065C Motor

Bearing Section Operating Specifications and Limits

Diamond Bearings

WOB and backreaming weight	40 klb	180 kN
Re-run overpull and set-down weight*	80 klb	360 kN
Ultimate overpull to failure upper bearing housing stabilizer*	674 klb	3,000 kN
Ultimate overpull to failure stuck bit*	225 klb	1,000 kN

Performance Charts

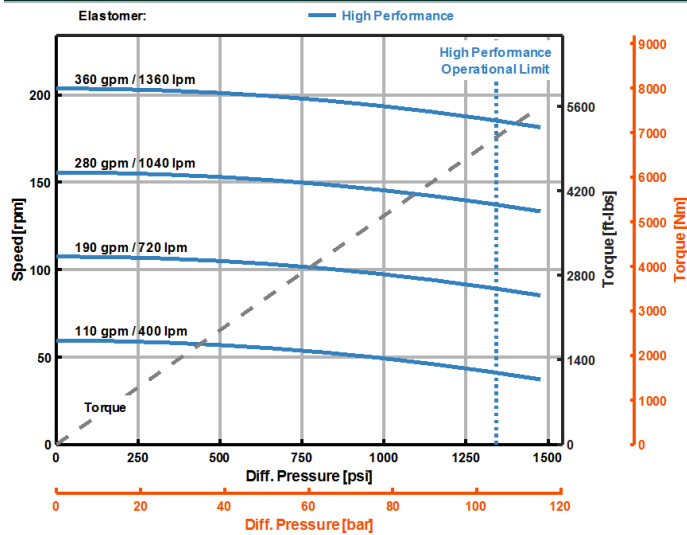

* Motor Performance specifications and related charts are derived from dynamometer testing performed with water at 68°F (20°C) as the working fluid. Motor power sections were assembled for maximum performance and longevity in the testing environment on surface and are presented for comparative analysis and operational calculations. Motor performance specifications subject to change without notice. Actual downhole operational performance may vary due to temperature, fluid type and rotor/stator fit adjustments. If the motors, that have been assembled to compensate for downhole temperature effects, are surface tested, they may show reduced performance on surface and at low temperatures.

Build Up Rate Chart

Hole Size		Partial (UBH stab)			Full (UBH and CTT Stab)		
		AKO	BUR	RPM*	AKO	BUR	RPM*
5½ in.	A1	0.6	3	102	0.6	3	120
	A2	1.8	19	60	1.8	20	60
	A3						
	A4						
6 in.	A1	0.6	3	120	0.6	3	120
	A2	1.8	18	60	1.8	20	60
	A3						
	A4						
6¾ in.	A1	0.6	3	120	0.6	3	116
	A2	1.8	11	60	1.8	20	60
	A3						
	A4						
7 in.	A1	0.6	3	120	0.6	1	116
	A2	1.8	13	60	1.6	20	60
	A3						
	A4						

A1: Minimum building AKO setting
A2: Recommended maximum rotatable AKO setting
A3: Absolute maximum rotatable AKO setting
A4: Absolute maximum oriented setting

Copyright 2020 Baker Hughes Company. All rights reserved. The information contained in this document is company confidential and proprietary property of Baker Hughes and its affiliates. It is to be used only for the benefit of Baker Hughes and may not be distributed, transmitted, reproduced, altered, or used for any purpose without the express written consent of Baker Hughes.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your Baker Hughes representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes Company. Navi-Drill is a trademark of Baker Hughes Company.