



DPS5000 SDI-12

Digital pressure sensing platform

The new DPS5000 SDI-12 from Druck, part of the UNIK5000 family, offers integrated digital electronics to enhance the performance level of the UNIK 5000 Pressure Sensing Platform to levels unmatched by traditional analogue sensors. It uses SDI-12 protocol, over which fully compensated readings of pressure and temperature are sent, as well as control of many functions of the device.

High quality

With 45 years of pressure measurement experience, our field-proven Druck technology is at the heart of the new platform, resulting in a range of high quality, high stability pressure sensors.

Expertise

We have the people and the knowledge to support your needs for accurate and reliable product performance; our team of experts can help you make the right sensor selection, guiding you and providing the help and tools you need. It is important that you ensure that the sensor materials and performance selected are suitable for your application.

Features

- Ranges from 350 mbar to 70 bar
- Total accuracy to $\pm 0.1\%$ FS
- Stainless steel or titanium construction
- Wide temperature range $-40\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$
- Low power
- Customer set filter setting
- Excellent long-term stability

DPS5000 SDI-12 specifications

Operating pressure ranges

Gauge ranges

Any zero based range from 350 mbar to 70 bar (6 to 1000 psi)

Absolute ranges

Any zero based range from 350 mbar to 70 bar (6 to 1000 psi)

Barometric ranges

Any upper range limit (URL) with a minimum span of 350 mbar (5 psi) between 700 mbar to 1300 mbar (10 to 18 psi)

Over pressure

2 × pressure range for barometric range

4 × pressure range for all other ranges

Containment pressure

6 × pressure range (200 bar (3000 psi) maximum)

Supply

Voltage: 6 Vdc to 30 Vdc

Current: <10 mA measure at 25 °C

15 mA peak

<50 µA stand by

Output/communications

SDI-12 V1.3

Power on time

1000 ms to acquisition from power on

Insulation resistance

>100 MΩ at 500 Vdc

Performance

Pressure performance

Accuracy over the calibrated temperature range including zero and span setting and the effects of non-linearity, hysteresis and repeatability

A3 Premium: ±0.1 % FS over -10 to 50 °C (14 to 122 °F)

A2 Improved: ±0.2 % FS over -40 to 80 °C (-40 to 176 °F)

For barometric ranges FS is the URL

Accuracy effects increase pro-rate for pressure ranges below 700 mbar

Temperature performance

Accuracy over the calibrated temperature range ± 3 °C (6 °F) with 0.1 °C (0.2 °F) resolution

Long term stability

±0.05 % FS/year typical

±0.1 % FS maximum at reference conditions

±0.2 % maximum over five years at reference conditions is available by arrangement with the factory

Stability effects increase pro-rate for pressure ranges below 700 mbar

Physical specifications

Environmental protection

Up to IP68, see electrical connector section

Operating temperature range

-40 °C to 80 °C (-40 °F to 176 °F)

Pressure media

Fluids compatible with stainless steel 316L and Hastelloy C276 or titanium

Statement in accordance with the European pressure equipment directive

Enclosure materials

Stainless steel 316L PVDF (Nose cone) or titanium (body) and cable sheath as specified

Pressure connectors

See the ordering information

Electrical connector

Option code	Description	IP rating
2	Raychem cable	IP65
3	Polyurethane depth cable	IP68
4	Hytrek depth cable	IP68

Note: Maximum cable length is 457 m (1500 ft).

Wiring details

Core color	Function
Black	Case
Red	+ VE Supply
Blue	- VE Supply
White	SDI-12 Data
Screen	Case

General certifications

RoHS 2011/65/EU

CRN Certified 0F18611.513467890YTN for pressure ranges up to and including 100 bar

CE conformity

Pressure equipment directive 97/23/EC: sound engineering practice

EMC directive 2014/30/EU

BS EN 61326-1:2013

BS EN 61000-6-1: 2007

BS EN 61000-6-3: 2007 + A1:2011

Ordering information

1) Select part number

Main product Family

DPS	Digital output transducer													
	5	5000 series												
		Diameter and material												
		0	25mm stainless steel											
		T	25mm titanium											
		Electrical connection												
		2	Raychem cable (See Note 1)											
		3	Polyurethane depth cable											
		4	Hytrel depth cable											
		Electronics option												
		E	SDI-12 protocol											
		Compensated temperature range												
		TA	-10 to +50 °C (See note 2)											
		TC	-40 to +80 °C (See note 3)											
		Accuracy												
		A2	Improved											
		A3	Premium											
		Calibration												
		CC	Full thermal											
		Hazardous area certification												
		H0	None											
		Pressure connector												
		- Stainless steel												
		PA	G1/4 female											
		PB	G1/4 male Flat											
		PC	G1/4 male 60° Int cone											
		PD	G1/8 male 60° Int cone											
		PE	1/4 NPT female											
		PF	1/4 NPT male											
		PG	1/8 NPT male											
		PH	M20 x 1.5 male (3mm bore)											
		PJ	M14 x 1.5 60° Int cone											
		PL	7/16-20 UNJF male 74° Ext											
		PN	G1/2 male											
		PQ	G1/2 quick connect											
		PR	1/2 NPT male											
		PV	7/16-20 UNF female											
		PW	Depth cone (G1/4 female)											
		RV	R1/4 male											
		- Titanium												
		PA	G1/4 female											
		PB	G1/4 male flat											
		PF	1/4 NPT male											
		PH	M20 x 1.5 male (3mm bore)											
		PN	G1/2 male											
		PR	1/2 NPT male											
		PW	Depth cone (G1/4 female)											
		RJ	M20 x 1.5 male (8mm bore)											
		RK	M20 x 1.5 male (14mm bore)											
DPS	5	0	2	E	-	TA	-	A3	-	CC	-	H0	-	PA

2) Specify maximum working pressure unit and reference. Available units are:

Symbol	Description	Symbol	Description	Symbol	Description
bar	bar	mmH2O	millimeters water	inHg	inches mercury
mbar	millibar	cmH2O	centimeters water	Kgf/cm2	Kilograms force/centimeters square
psi	pounds/square inch	mH2O	meters water	atm	atmosphere
Pa	Pascal	in H2O	inches water	Torr	torr
hPa	hecto Pascal	ft H2O	feet water	MPa	Mega Pascal
Kpa	Kilo Pascal	mmHg	millimeters mercury		

3) Specify cable length and units:

Integer values in m or ft (maximum length 457 m (1500 ft)).

Notes:

Not available with a titanium body.

Choose A3-Premium accuracy with this option.





Choose A2-Improved accuracy with this option.

Typical order examples

DPS503E - TA - A3 - CC - H0 - PW 700 mbar gauge 10m cable

DPS5T4E - TC - A2 - CC - H0 - PA 10 bar absolute 10m cable

Mechanical drawings

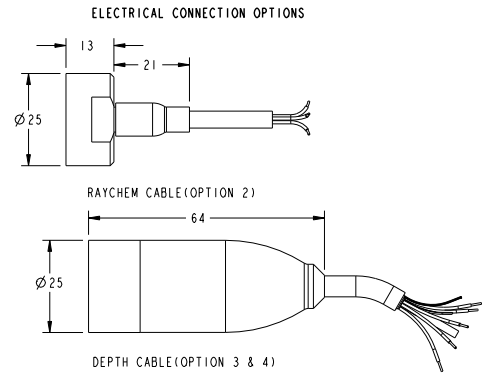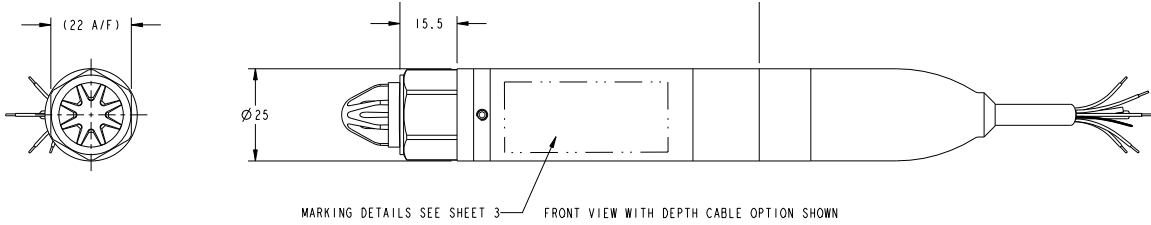

Note: All dimensions in millimeters.