

Masoneilan* 4700/4800 Corrosion Resistance Positioners

Masoneilan models 4700E/4800E (electropneumatic) and 4700P/4800P (pneumatic) are field-proven positioners from BHGE that use a precision feedback cam to provide accurate positioning, fast response, and customized control characteristics for control valves. These positioners can be used with either rotary or reciprocating actuators. On rotary actuators, the cam is mounted directly on the shaft. When mounted on reciprocating actuators, a simple, rugged turnbuckle and lever assembly couples stem motion to the cam.

The main features of the models 4700P/4700E and 4800P/4800E positioners are:

One Multi-lobe Cam

The cam provides field-changeable linear, split-range linear and equal percentage control characteristics. Custom characteristics are available on special order.

Zero Adjustment

Adjustment of the positioner zero can easily be accomplished by means of the adjustable spring button. Further zeroing can be performed through the turnbuckle assembly on linear motion actuators.

Corrosion-resistant Materials

Premium performance is the standard on the models 4700P/4700E and 4800P/4800E positioners. Internal components are manufactured of corrosion-resistant materials for protection against the harshest environments.

Fully Enclosed

All adjustments are fully enclosed for protection from the environment.

Simplicity

Positioner action can be reversed without additional parts (4700P/4800P only). The same mounting orientation is used for both direct and reverse action.

Easy to Maintain

The pilot valve is the only moving part in the pilot housing. It is easily removed without disassembling any other part of the positioner. An optional bypass valve module is available for use on the model 4700P pneumatic direct acting positioner. Where operating parameters allow, it permits the positioner to be isolated for maintenance while operating the valve directly with the instrument signal. The bypass module is mounted on the back of the positioner to discourage tampering.

Optional Bypass

A molded nylon bypass valve with an O-ring seal permits continued automatic control during the cleaning of the pilot valve. The bypass valve is concealed in back of the unit to prevent tampering. The bypass is available only on the direct action 4700P pneumatic positioner.


Damping Adjustment

On model 4700, actuator travel speed can be adjusted as required for stable operation



Numbering System

Series Identification 4abcd

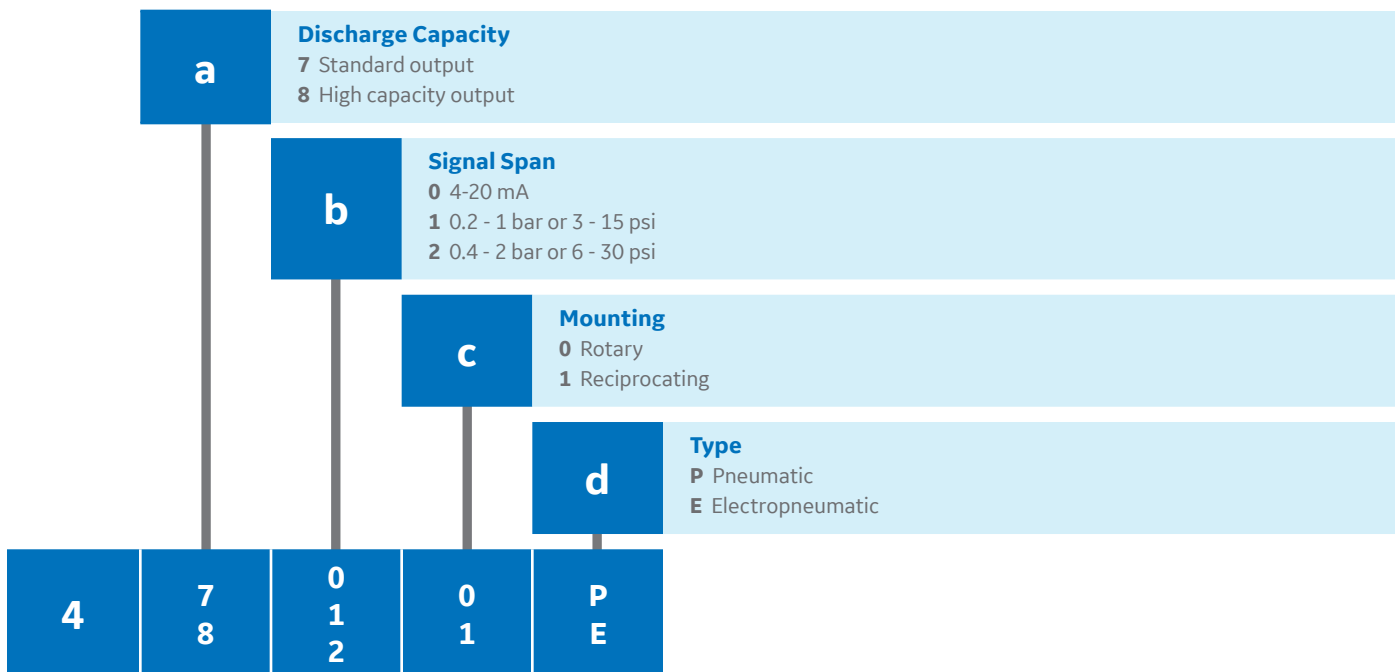

Specification Data

Type: Cam feedback, pneumatic, force balanced; electropneumatic positioner uses current to pneumatic converter to generate pneumatic operating signal.

Action: Direct: Increasing signal increases output
Reverse: Increasing signal decreases output
Note: Reverse Action is available only on 4700P/4800P Pneumatic Positioner

Characteristics: Linear
Equal percentage
Custom

Maximum air consumption: 4700: 0.5 Nm³/h - 1.7 barg supply
4800: 0.9 Nm³/h - 1.7 barg supply

Output and exhaust capacity: 4700: 13.5 Nm³/h - 4.1 barg supply
4800: 24 Nm³/h - 4.1 barg supply

Temperature effects span error (typical):

| Temp. Range | Error |
|-----------------------------------|---------------------|
| -40°C to -20°C (-40°F to -4°F) | 0.31 percent per °C |
| -20°C to +60°C (-4°F to +140°F) | 0.06 percent per °C |
| +60°C to +85°C (+140°F to +185°F) | 0.11 percent per °C |

Supply pressure influence: Less than 0.37 percent stroke change per 100 mbar supply change.

Maximum air supply rating: Dictated by actuator, but never greater than 100 psig.

Connections: Pneumatic: 1/4» NPT (4700) or 3/8» NPT (4800)
Electrical: 1/2» NPT or M20

Weight: 4700P - 1.6 kg (3.5 lbs) 4800P - 1.9 kg (4.2 lbs)
4700E - 2.1 kg (4.7 lbs) 4800E - 2.4 kg (5.3 lbs)

| Performance | 4700P | 4700E |
|---------------------------------|---------------------------------|---------------------------------|
| Deadband | ≤0.2 percent of span | ≤0.5 percent of span |
| Hysteresis | ≤0.2 percent of span | ≤0.5 percent of span |
| Repeatability | within 0.2 percent of span | within 0.5 percent of span |
| Sensitivity | better than 0.2 percent of span | better than 0.3 percent of span |
| Conformity | ±1 percent of span | ±1 percent of span |
| Input resistance 4-20 mA signal | N/A | 170 ohms nominal |

bhge.com

*Denotes a trademark of Baker Hughes, a GE company LLC.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

© 2019 Baker Hughes, a GE company LLC - All rights reserved.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your BHGE representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes, a GE company. The GE Monogram is a trademark of the General Electric Company.

GEA20204A 01/2019

**BAKER
HUGHES**
a GE company

