

Mooney* 4" Flowgrid* Regulator and Shutoff Valve


Flanged CL 150, 300

The 4" Mooney Flowgrid Slam Shut is a combination of a regulator and a slam shut. In addition to pressure regulation, this pneumatically actuated device provides automatic downstream pressure protection. By separating the pneumatic controller and mechanical latching mechanism, shut off occurs only when designated set points are reached. The patent pending design prevents disruptive and costly "accidental shutoffs". Positive shutoff is achieved instantly through the snap acting mechanism, and reset can be completed with common tools.

Specifications

| | |
|-------------------------------|--|
| Size | 4" |
| Body Style | Standard Single Port Slam Shut |
| End Connections | 4"CL 150 RF Flange, 4" CL 300 RF Flange |
| Temperature | Working -20°F to 150°F (-29°C to 65°C) |
| Minimum Differential | Refer to graph on page 2 |
| Cracking Differential | Refer to graph on page 2 |
| Maximum Inlet Pressure | 740 psig (50 bar) |
| Outlet Pressure Range | Limited by SSV Controller and Series 20 Pilot |
| Flow Direction | Uni-Directional |
| Body Taps | Four 1/4" - 18 NPT (one inlet, one center port ¹⁾ , one loading and one downstream) |

1) Center port - between flapper valve and regulator

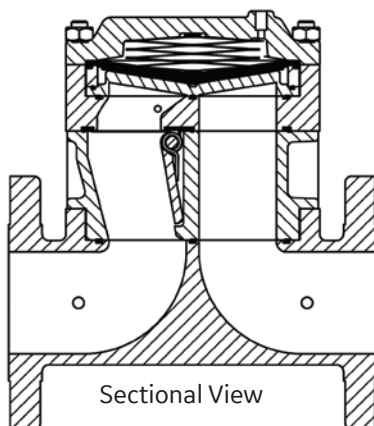

Flowgrid Regulator with Integral Shutoff Valve, Series 50D Dual Function Controller.


Materials of Construction

| | |
|---|--|
| Body & Spring Case, Seal Retainer and Flapper Body | ASTM A 216 GR WCB Carbon Steel |
| Throttle Plate, Flapper and Shaft | 17 - 4PH Stainless Steel or A515 Carbon Steel with ENC Coating |
| Diaphragm | Nitrile/Nylon* |
| O-Ring and Seals | Nitrile, Optional Viton [®] |
| Studs and Nuts | ASTM A 193 GR B-7 ASTM A 194 GR 2H or Equal |
| Springs | 301 Stainless Steel ASTM A 313-03 17-17 SS |
| Bushings | Acetal |

Stock Numbers

| 3" Flowgrid & Shutoff Valve | Stock Number | Retrofit | Weight |
|-----------------------------|--------------|----------|----------|
| 150# Flange | SG-39 | SR-16 | 123 lbs. |
| 300# Flange | SG-40 | SR-17 | 133 lbs. |
| 150/300 Butt weld | SG-61 | SR-61 | 111 lbs. |

Dimensions

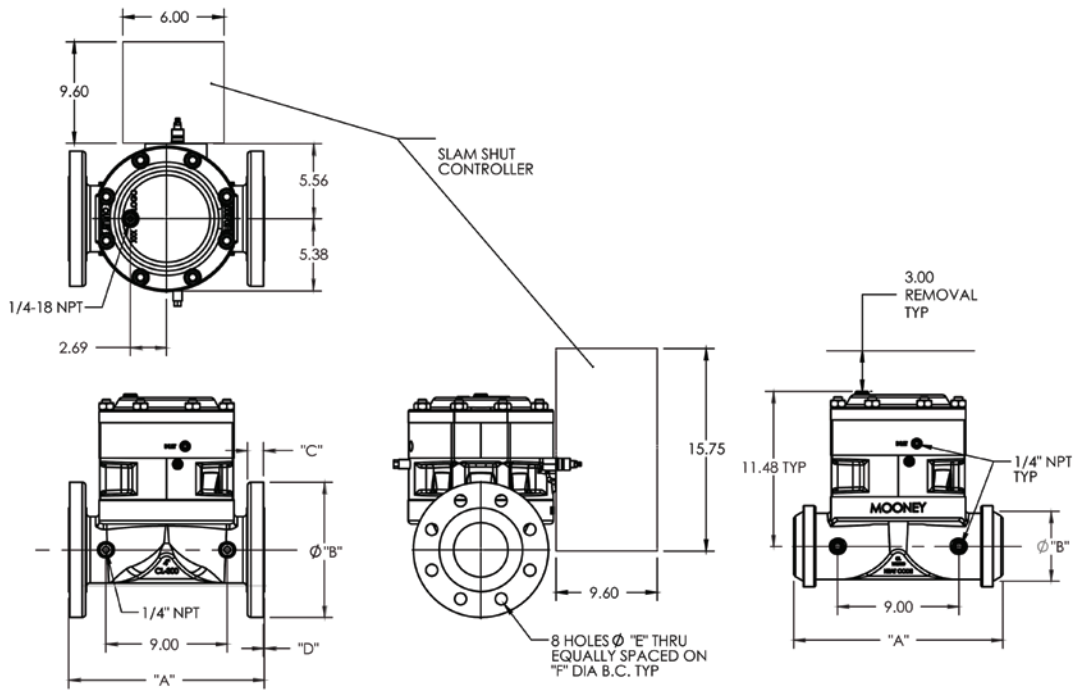

Flange Dimensions


| Flange Class | A | B | C | D | E | F |
|--------------|-------|------|-------|-------|-------|------|
| Class 150 | 13.88 | 1.00 | 9.00 | 0.062 | 0.750 | 4.75 |
| Class 300 | 14.5 | 1.25 | 10.00 | 0.062 | 0.875 | 7.87 |

Flow Coefficients and Constants⁽¹⁾

| 4" Standard Port Slam Shut | | | | Swage Factor | |
|----------------------------|----------------|----------------|----------------|--------------|------|
| % Capacity | C _v | C ₁ | C _g | 1.5:1 | 2:1 |
| 100% | 172 | 38 | 6500 | 0.97 | 0.95 |
| 75% | 142 | 37 | 5300 | 0.98 | 0.96 |
| 50% | 100 | 35 | 3550 | 0.99 | 0.98 |
| 35% | 76 | 35 | 2700 | 1.00 | 1.00 |

1) Preliminary Data.

Minimum Pressure Differential vs. Capacity

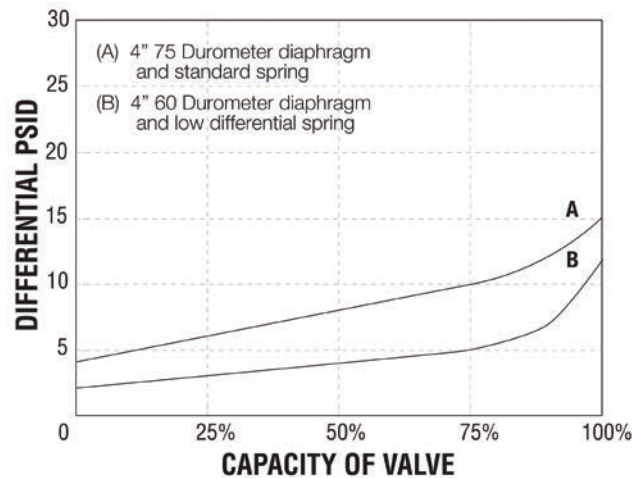

Diaphragm Selection

| Compound | Temp. Range (°F) | Maximum Differential | Characteristics | Recommended Applications |
|------------------|------------------|----------------------|--|---|
| 75 Duro | -20 to 150 | 1000 psid | Best All Around Material | 60 psid to Max. Differential |
| 60 Duro | -25 to 150 | 300 psid | Best Shutoff at Low Differential Pressure | Low Differential (100 psid or less) or Low Temperature |
| 80 Duro High ACN | -5 to 175 | 1000 psid | Higher Abrasion and Swelling Resistance | High Differential (400 psid or higher) or Abrasive Conditions with Distillates |
| 80 Duro Low ACN | -20 to 150 | 1000 psid | Higher Abrasion Resistance and Low Temperature Flexibility | High Differential (400 psid or higher) or Abrasive Conditions at Low Temperatures |

bhge.com

*Denotes a trademark of Baker Hughes, a GE company LLC.

Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

© 2018 Baker Hughes, a GE company LLC - All rights reserved.

Baker Hughes reserves the right to make changes in specifications and features shown herein, or discontinue the product described at any time without notice or obligation. Contact your BHGE representative for the most current information. The Baker Hughes logo is a trademark of Baker Hughes, a GE company. The GE Monogram is a trademark of the General Electric Company.

GEA34056 12/2018

