

Flame Tracker

Aeroderivative Approved

Designed to meet the requirements of the aeroderivative OEM for use on gas turbines; Built under the AS9100 aviation quality system.

Designed for peak performance and reliability

The Silicon Carbide (SiC) Flame Tracker dramatically improves gas turbine performance while significantly reducing maintenance requirements. Available for a variety of gas turbines, the Flame Tracker flame sensor's optical photodiode is designed for use with multiple fuels and combustion systems.

Advantages

High sensitivity, fast response

Flame Tracker, with its SiC photodiode, has high sensitivity to the longer UV wavelengths that easily penetrate the fog of fuel and steam. In addition, the SiC sensor has an analog output with a very wide dynamic range and rapid response time. These features offer the ability to quickly—in less than 25 milliseconds—report flame status. This means fast response times and safer operation.

Reduced maintenance

The Flame Tracker flame sensor is equipped with quick disconnect connectors, allowing sensor replacement time to be reduced from hours to minutes. Its improved sensor-cooling feature lowers the impact of surrounding heat and extends the life of electronics.

Sensor Cooling Options

Reuter-Stokes offers both an air cooling can for compressed air and a water cooling coil.



Multiple applications

Designed to replace outdated technology, the Flame Tracker is applicable to a variety of land-based and marine-based gas turbines, regardless of size. In addition, it is ETL, ATEX, IECEx, and SIL certified.

Reliable, low voltage operation

Providing a 4–20 mA industry-standard output signal, the Flame Tracker operates reliably with any fuel—with or without—steam injection. Unlike older flame sensors that require high voltage for operation, the Flame Tracker requires low voltage, which eliminates special wiring and explosion-proof conduit requirements.

Performance benefits


- Provides reliable operation when using any fuel
- Allows full operation during the water wash cycle
- Reduces maintenance time
- Operates on low voltage
- Provides rapid response to flameout
- Produces a wide dynamic range
- Customized conversion kits
- Meets all NFPA guidelines for flame detection on gas turbines



Specifications

Sensor responsivity and hydrocarbon flame emission spectrum

Spectral response

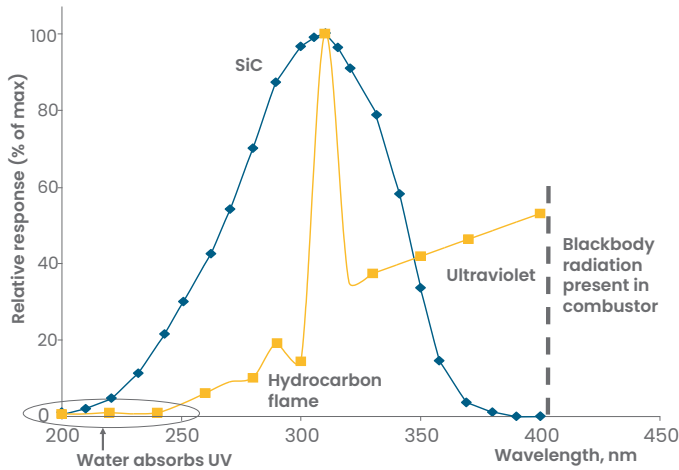

— Flame emission

SiC

Peak sensitivity closely matches the key flame peak at 310 nm.

Operating

Power requirements	24 VDC nominal, 12-30 VDC @ 100 mA
Output	4-20 mA (a module to convert output to other controller inputs is available)
Response time	< 25 milliseconds
Temperature range	-20°F to +300°F (-30°C to +150°C), 455°F (235°C) with specified water or air cooling
Process pressure	To 400 psig (2.8 MPa)
Sensitivity	5 mA @ 1×10^{10} photons/in ² /sec. @ 310 nm

Material

Body mount	AISI 316 stainless steel
Housing	AISI 304 stainless steel (sealed and Argon filled)
Mechanical interface	3/4" NPT female
Electrical connector	MIL-C-38999 series III size 15 (5pin)
Sensor	Silicon Carbide (SiC) photodiode

Reuter-Stokes Flame Sensors and Accessories for Aeroderivative Applications

Description	Reuter-Stokes Part Number
Flame Tracker, Aeroderivative - GE Aerospace	RS-FS-9006
Flame Tracker, Aeroderivative - End Users	RS-FS-9006-MFR
Air Cooling Can - GE Aerospace	RS-E2-0259
Air Cooling Can - End Users	RS-E2-0259-MFR
Interconnect Cables	RS-E2-0285PXXX

reuter-stokes.com

Copyright 2024 Baker Hughes Company. All rights reserved.

BHCS34179 (5/2024)

Baker Hughes 

reuter-stokes.com